



安装外形图 Overall dimension

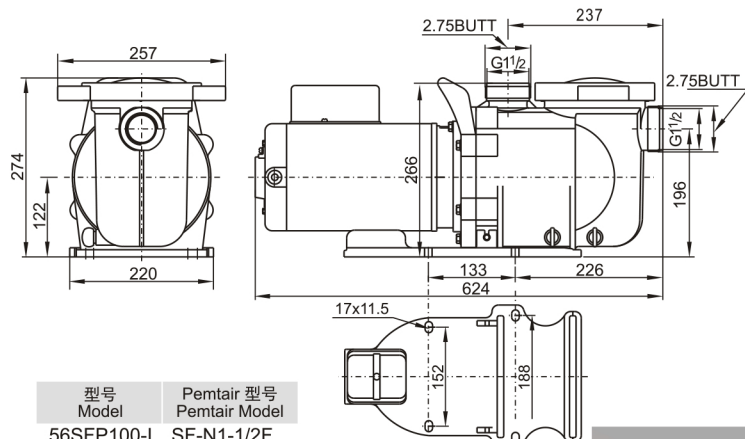

型号 Model	Pentair 型号 Pentair Model
56SFP100-I	SF-N1-1/2F
56SFP150-I	SF-N1-3/4A
56SFP200-I	SF-N1-1A
56SFP250-I	SF-N1-1-1/2A
56SFP300-I	SF-N1-2A
56SFP350-I	SF-N1-2-1/2A
56SFP200-II	SF-N2-1A
56SFP250-II	SF-N2-1-1/2A
56SFP300-II	SF-N2-2A
56SFP350-II	



Recirculation of water in swimming pool equipment

特点

- * 此系列产品是我司参考市场上使用的习惯尺寸后，完全独立开发的；
- * 安装尺寸与滨特尔SF-N1系列产品相同
- * 一体式提手，安装便捷。

Features

- * This series product is us completely independent development, the overall size is reference to the market habit.
- * The Installation dimensions same as Pentair SF-N1 series products.
- * Integral structure handle, convenient installation.



工作条件

介质温度: 5-50℃
环境温度: <50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

性能曲线 Performance curves

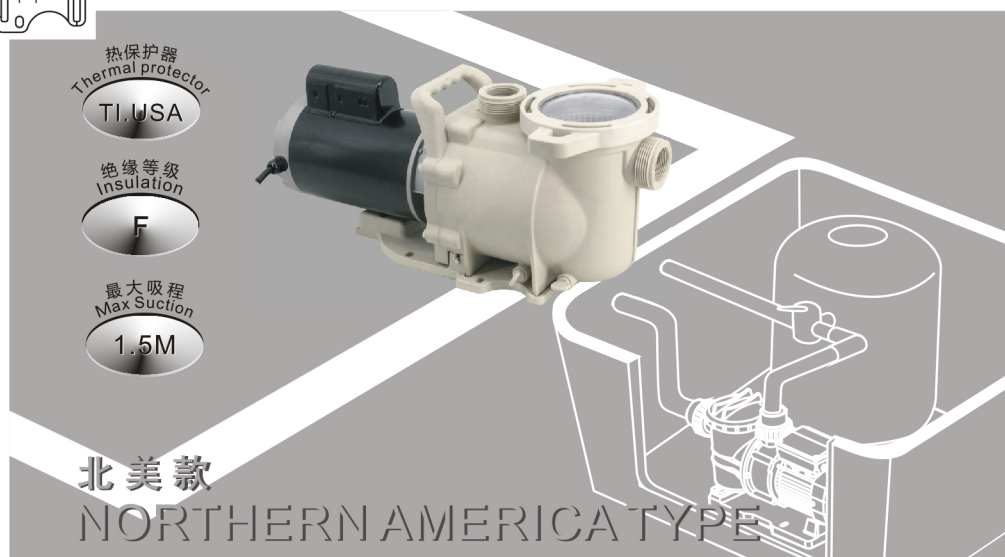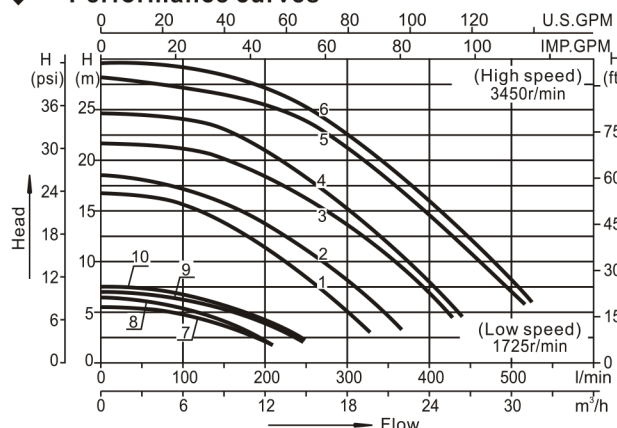

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	输入功率 Power(P1)		电压 V	频率 Hz	电流 (Amps)	接头尺寸 Fitting size (mm)	曲线 (curves)	包装尺码 Packing size (mm)
			kW	HP						
56SFP100-I	330	17	0.75	1.0	220-240	60	4	48.5or50	1	670×295×335
56SFP150-I	365	18.5	1.1	1.5	220-240	60	5.4	48.5or50	2	670×295×335
56SFP200-I	400	21	1.5	2.0	115/208-230	60	13.2/6.2-6.6	48.5or50	3	670×295×335
56SFP200-I	400	21	1.5	2.0	220-240	60	6.6	48.5or50	3	670×295×335
56SFP250-I	440	25	1.85	2.5	115/208-230	60	16/7.8-8	48.5or50	4	670×295×335
56SFP250-I	440	25	1.85	2.5	220-240	60	8	48.5or50	4	670×295×335
56SFP300-I	520	28	2.2	3.0	220-240	60	10	48.5or50	5	670×295×335
56SFP350-I	530	29.5	2.6	3.5	220-240	60	11	48.5or50	6	670×295×335
56SFP200-II	400	21	0.37/1.5	0.5/2.0	220-240	60	2.3/6.6	48.5or50	3/7	670×295×335
56SFP250-II	440	25	0.37/1.85	0.5/2.5	220-240	60	3/8	48.5or50	4/8	670×295×335
56SFP300-II	520	28	0.55/2.2	0.75/3.0	220-240	60	3.5/10	48.5or50	5/9	670×295×335
56SFP350-II	530	29.5	0.55/2.6	0.75/3.5	220-240	60	3.5/11	48.5or50	6/10	670×295×335

