


性能表/Performance table

泵型号 Model	参考型号 Reference model	功率 Power P ₂ (kW)	流量 Q (m³/h)	8	10	12	14	16	18	20	24	26	28
CVLA20-1	CDLF20-1	1.1	扬程 H (m)	14	13.5	13	12.5	12	11.5	10.5	9	8	7
CVLA20-2	CDLF20-2	2.2		28	27	26	25	24	22.5	21	18	16	14
CVLA20-3	CDLF20-3	4.0		41	40	39	38	36	34	32	27	24	21
CVLA20-4	CDLF20-4	5.5		54	53	52	51	50	46	43	36	32	27
CVLA20-5	CDLF20-5	5.5		68	67	65	63	61	58	55	45	40	33
CVLA20-6	CDLF20-6	7.5		82	80	78	77	73	70	66	55	48	40
CVLA20-7	CDLF20-7	7.5		96	94	92	89	86	82	77	65	58	47
CVLA20-8	CDLF20-8	11		110	107	104	102	99	95	89	76	67	56
CVLA20-10	CDLF20-10	11		137	135	132	127	124	118	112	98	86	73
CVLA20-12	CDLF20-12	15		164	162	158	154	149	142	136	118	106	90
CVLA20-14	CDLF20-14	15		191	189	186	181	176	169	161	140	126	110
CVLA20-16	CDLF20-16	18.5		219	217	214	208	203	198	186	164	147	129
CVLA20-17	CDLF20-17	18.5		234	231	228	223	217	210	202	178	162	142

安装图/Installation sketch

法兰式 FGJ(DIN-ANSI-JIS)
PN16-25-40(DN50)

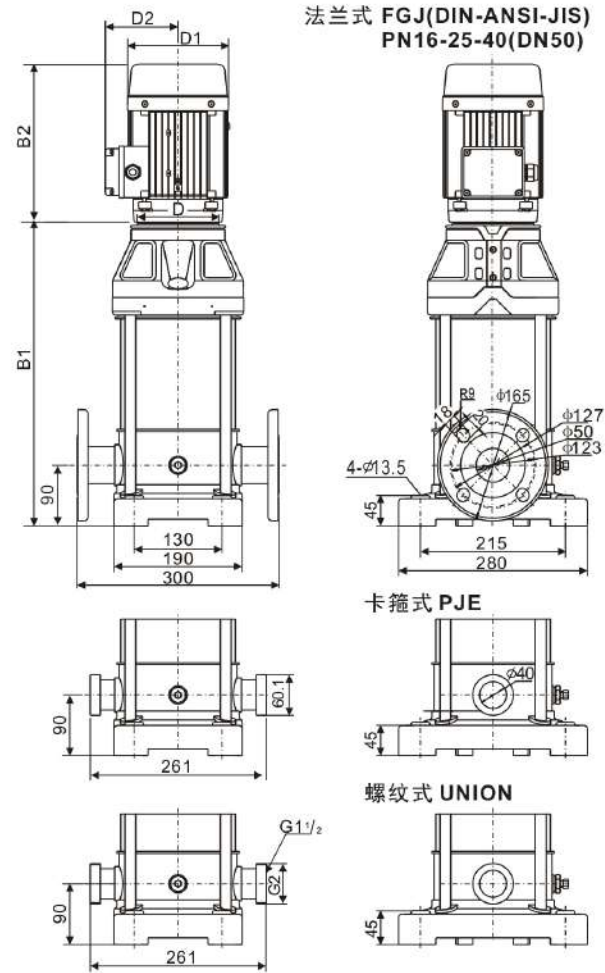

泵型号 Model	尺寸/Dimensions(mm)											
	单相 single phase					三相 Three phase					D	
	B1	B2	B1+B2	D1	D2	B1	B2	B1+B2	D1	D2	V18	V1
CVLA20-1	336	240	576	150	118	336	240	576	150	118	121	—
CVLA20-2	393	300	693	168	147	393	280	673	168	127	135	—
CVLA20-3	—	—	—	—	—	448	323	771	200	146	145	—
CVLA20-4	—	—	—	—	—	518	379	897	212	160	185	300
CVLA20-5	—	—	—	—	—	563	379	942	212	160	185	300
CVLA20-6	—	—	—	—	—	608	417	1025	212	160	185	300
CVLA20-7	—	—	—	—	—	653	417	1070	212	160	185	300
CVLA20-8	—	—	—	—	—	783	448	1231	255	178	250	350
CVLA20-10	—	—	—	—	—	873	448	1321	255	178	250	350
CVLA20-12	—	—	—	—	—	963	489	1452	255	178	250	350
CVLA20-14	—	—	—	—	—	1053	489	1542	255	178	250	350
CVLA20-16	—	—	—	—	—	1143	542	1685	313	257	250	350
CVLA20-17	—	—	—	—	—	1188	542	1730	313	257	250	350

